
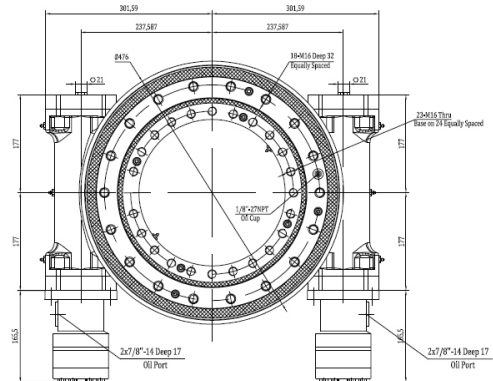


DREHGERÄT TYP 3-C-2 TÊTE ROTATIVE

SCHNECKENANTRIEB PROPULSION À VIS

- ✓ Kompakte Bauart
- ✓ Anwendung für Greifersäge, Mulcher, Mähkorb, usw.
- ✓ Conception compacte
- ✓ Utilisation pour scie grappin, broyeur, godet de fauchage, etc.

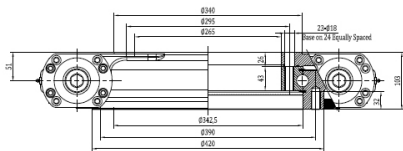


HYDRAULIC MOTOR PERFORMANCE DATA BMRS160 (157,2 cm³ / rev.)

	Pressure (MPa)							
	5	7	9	10	12	14 continue (max.)	16	17,5 intermittent (max.)
10	115	160	203	220	260	300	340	362
	58	55	52	50	44	38	34	26
20	114	160	205	230	265	320	355	380
	119	115	111	108	103	95	84	76
30	105	158	202	221	261	305	344	378
	148	181	177	172	165	153	134	130
40	100	145	196	218	257	299	340	374
	246	244	239	237	230	218	199	184
50	90	140	190	209	250	295	336	366
	307	305	302	300	292	280	262	244
60	84	136	180	199	240	286	330	360
	370	368	364	362	355	342	334	304
70 continue (max.)	65	120	164	180	223	280	320	350
	435	434	430	427	416	405	385	366
75 intermittent (max.)	59	116	158	175	220	272	314	342
	465	462	458	456	447	433	416	395

→ Torque (N.m)
→ Speed (rpm)

MOMENT LOAD CHART Tilting Moment & Axial Load

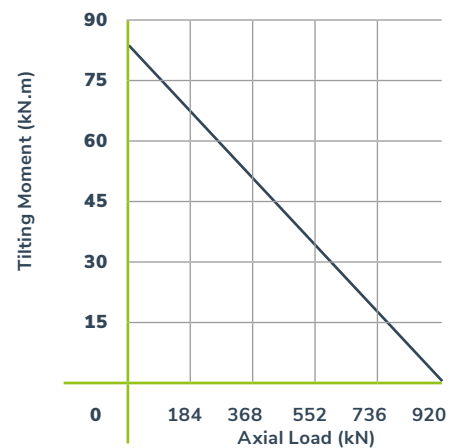

SLEWING DRIVE PERFORMANCE PARAMETERS

Rated Output Speed	Output Torque	Tilting Moment	Holding Torque	Static Axial Load Rating	Static Radial Load Rating	Gear Ratio	Precision	Weight
2,11 rpm	13,6 N.m	81 kN.m	102 kN.m	920 kN	343 kN	84:1	≤0,1 7°	99,5 kg
	10 × 10³ lbf.ft	59,8 × 10³ lbf.ft	75,3 × 10³ lbf.ft	207 × 10³ lbf	77,2 × 10³ lbf			

HYDRAULIC MOTOR PERFORMANCE PARAMETERS

Pressure	Flow
9 MPa	30 L / min

Drehdurchführungen Seite 90 Joint rotatif page 90



Leistungsstarke Greifer
und Anbaugeräte

CH-6166 Hasle ■ info@litech.ch ■ +41 41 480 47 47 ■ www.litech.ch

Online-Shop
www.holzgreifer.ch

